



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems



NOISE S.T.O.P.™ Interior/ Exterior Acoustical Windows

**Engineered to be the markets first affordable,
high performance acoustical window**

- A truly affordable high performance noise control window
- Performance tested & certified at an affordable price
- STC Ratings of 45 to 56
- Custom engineered and manufactured to any size at no extra charge
- Anodized aluminum frames with standard frame finishes of natural aluminum and bronze. *Also available in other specialty finishes*
- Quick turnaround delivery upon order!
- Easy Installation. No need for a glazing contractor or special tools required. ASI includes installation instructions and necessary shop drawing
- Fast and easy do it yourself installation
- Custom glass available (safety glass, mirror pane, tinted and etc.) Note: using custom glass may change the STC value
- **NOTE:** glass shipped separately to avoid breakage. Easy snap in glass installation on job site
- **Noise S.T.O.P. acoustical windows are only available from Acoustical Surfaces, Inc.**



TYPICAL APPLICATIONS:

- Recording Studios
- Commercial Windows
- Industrial
- Military
- Victim/Interrogation Room

Continued on next page...



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems


Noise S.T.O.P.™ WINDOW MODEL Studio 4

Features:

- 4° angled glass for max acoustical performance. Optional flat glass configuration.
- STC rating of 45
- Custom sizes
- Min size of 2' by 2'
- Max size of 4' by 8' rectangle or 5' by 5' square clear opening
- Larger units available with mullions
- Optional tinted, one-way mirror pane, safety glass and etc.

Window Specifications:

- 1" insulated glass unit with 2 pieces of 1/4" laminated glass.
- Angeled glass for maximum acoustical performance
- Acoustically treated frames and seals
- Class A-1 ASTM E-84 Nonflammable Sound Silencer™ acoustical frame insert
- Fits any wall thickness by inseting or offsetting acoustical window

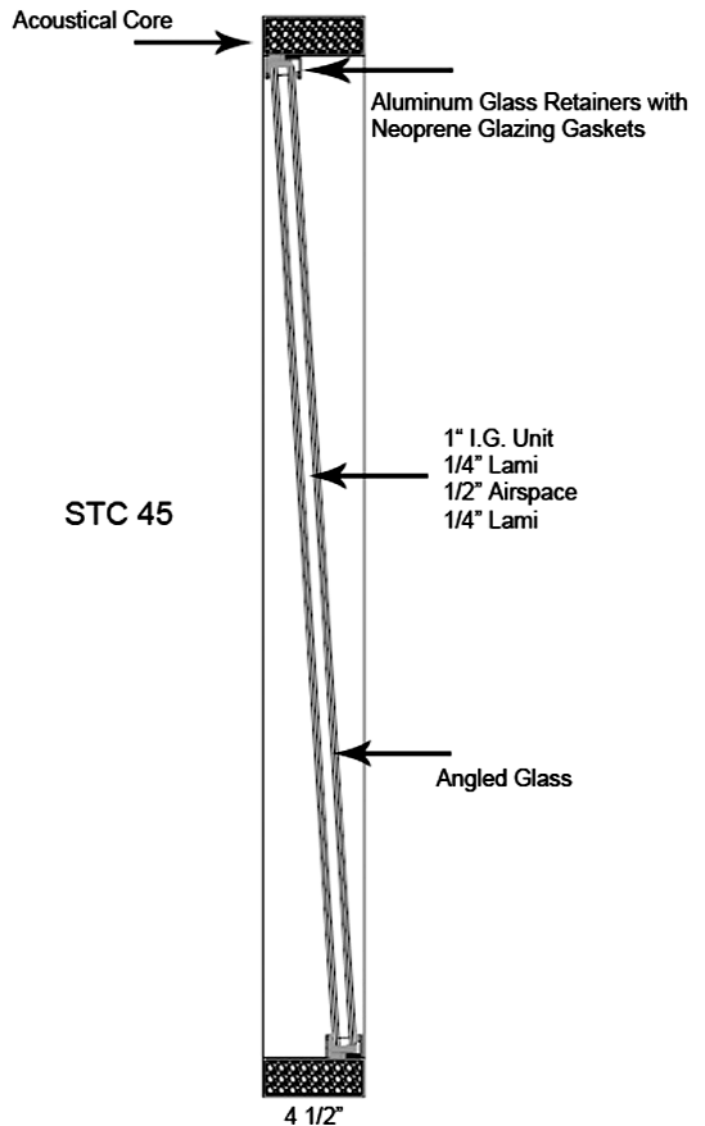

Continued on next page...



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems


Noise S.T.O.P.™ WINDOW MODEL Studio 5

Features:

- STC rating of 49
- Custom sizes
- Min size of 2' by 2'
- Max size of 5' by 10' rectangle
- Larger units available with mullions
- Optional tinted, one-way mirror pane, safety glass and etc.

Window Specifications:

- 3/8" laminated glass with air cavity and 1/4" laminated glass
- 4-1/2" aluminum frame
- Acoustically treated frames and seals
- Class A-1 ASTM E-84 Nonflammable Sound Silencer™ acoustical frame insert
- Fits any wall thickness by inseting or offsetting acoustical window

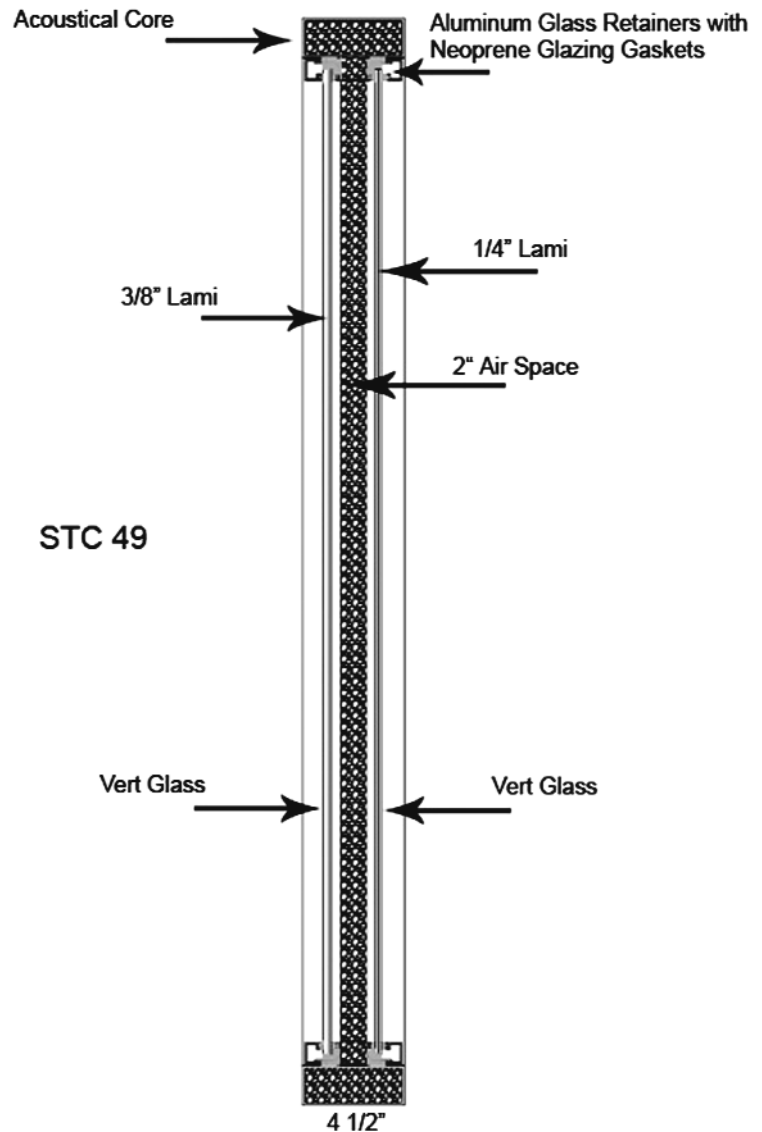

Continued on next page...



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

Noise S.T.O.P.™ WINDOW MODEL Studio 6

Features:

- 4° angled glass for max acoustical performance. Optional flat glass configuration.
- STC rating of 56
- Custom sizes
- Min size of 2' by 2'
- Max size of 4' by 8' rectangle or 5' by 5' square clear opening
- Larger units available with mullions
- Optional tinted, one-way mirror pane, safety glass and etc.

Window Specifications:

- One insulated glass unit with 2 pieces of 1/4" laminated glass plus an air cavity and an additional pane of 3/8" laminated glass.
- 6-3/8" aluminum frame
- Acoustically treated frames and seals
- Angeled and flat glass for maximum acoustical performance
- Class A-1 ASTM E-84 Nonflammable Sound Silencer™ acoustical frame insert
- Fits any wall thickness by inseting or offsetting acoustical window

