


Anchorage 2335 (66")
Open House 2334 (54")

MULTI-PURPOSE | UPHOLSTERY
 PANEL | ACOUSTIC




White*
2664




Birch
2129




Vanilla
2130



Angora
2035



Goose
2049



Asteroid
2053



Fossil
2093



Graphite
2079




Coffee Bean
2083




Onyx
2016



Slate
2017




Wolf
2027




Quarry Blue
2026



Waterfall
2691



Pool
2842




Lapis
2094




Thistle
2085



Cobalt
2045



Midnight
2025




Orchid
2843



Eucalyptus
2047




Cumin
2050




Green Apple
2087




Willow
2028




Fern
2840



Turquoise
2841



Pine Needle
2022



Deep Water
2051




Sunshine
2082




Straw
2034




Goldenrod
2090




Lemon
2839




Pumpkin
2021




Geranium
2084




Poppy
2091



Red Delicious
2014



Mulberry
2044



Aubergine
2036

*Not recommended for use as Upholstery.

Anchorage 2335 (66") Open House 2334 (54")

Specifications


Content	65% pre-consumer recycled polyester 35% post-consumer recycled polyester
Weight	2334 - 13.1 ± 1.0 oz./lin. yd. 2335 - 15.0 ± 1.0 oz./lin. yd.
Width	2334 - 54" min. useable 2335 - 66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

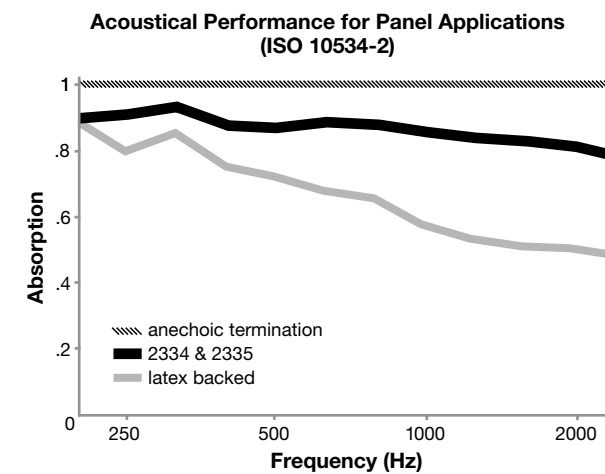

NRC of anechoic termination **1.00**
 NRC of fabric in front of anechoic termination **.85**

Performance

- Colorfastness to Light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours
- Colorfastness to Crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet
- Breaking Strength (ASTM D5034)
275 lbf min. warp and fill
- Seam Slippage (ASTM D4034)
50 lbf min. warp and fill
- Pilling Resistance (ASTM D3511)
Class 4 min.
- Flammability
**CA Technical Bulletin 117-2013 Section 1
ASTM E84 Class I or A**
- Abrasion (ASTM D4157)
250,000 double rubs min. cotton duck

Sustainability

- 100% recycled and recyclable**
Terratex is a registered trademark of Duvaltex

Miscellaneous

Proudly woven in North America supporting our local communities.

Please specify when ordering whether 54" or 66" width is needed. Dye lots may vary. Differences may also occur between corresponding colors of Anchorage 2335 and Open House 2334.

Application testing of this product is recommended. This is a directional fabric.

Visit guilfordofmaine.com for samples.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized component fabric is not required on approved panels from participating manufacturers.

*Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Certification Marks owned by the Association for Contract Textiles, Inc.