



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem

Sound Masking Loudspeaker

smartSMS

SMS-STR

The Soft dB's SMS-STR is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 13 cm (5 in.) driver installed in a sealed enclosure.


The design is ideal in open structure ceiling configurations since the speaker, terminal and switch will be hidden when the speaker is hung from the deck. It can also be installed above suspended ceiling in typical sound masking installations. A rotary switch allows quick adjustment of the output level with 4W, 2W, 1W, 1/2W, 1/4W position available at 25V. The loudspeaker is also compatible with 70V systems with 8W, 4W, 2W adjustment available.

Specifications

Power:	10 watts
Line Voltage:	25 V and 70V
Sensitivity:	91 dB
Material:	Metal
Frequency Response:	100-8000 Hz
Connectors:	Wire and Lock-screw
Color:	White
Diameter:	196 mm (7.7 in)
Height:	122 mm (4.8 in)
Weight:	1.86 kg (4.1 lbs)
Shipping Weight:	2.3 kg (4.9 lbs)



Frequency Response

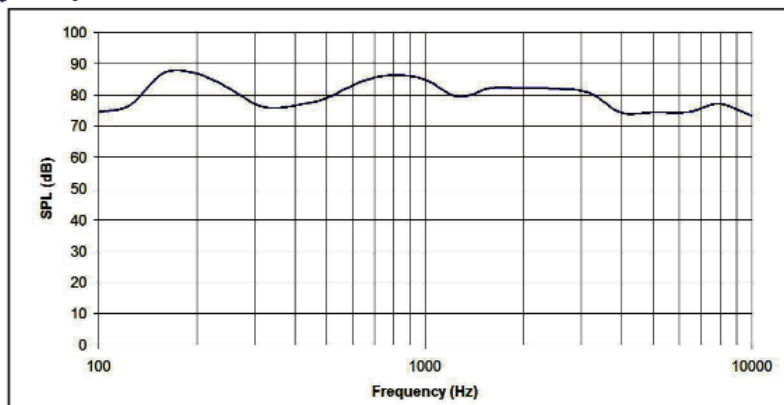

Specifications are subject to change without notice

Contact: Christian St-Pierre
 (514) 727-3800
 (514) 703-1553
c.stpierre@softdb.com

Soft dB