


Noise S.T.O.P.™ Contact Adhesive Spray

Heavy Duty Wide Web Spray Adhesive

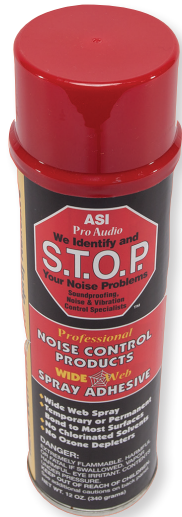

This heavy-duty spray contact glue spray is one of the highest performance aerosol adhesives available. For both temporary or permanent bonding, this high solids product is ideal for uneven or porous surfaces. Waterproof, flexible, transparent and non staining, use this contact adhesive spray for your toughest adhesive applications, including noise control and pro audio applications made of foam, fabric, cotton, fiberglass, polypropylene, leather, cardboard, most plastics and many other materials. This contact glue spray is not intended for use on vinyl.

Formulated with the environment in mind, this contact adhesive spray contains NO CHLORINATED SOLVENTS OR OZONE DEPLETERS. Cleans easily with Mineral Spirits.

DANGER

Contains Acetone and Hexane. Extremely Flammable. Use with adequate ventilation. Keep away from heat, sparks, open flame or other ignition sources. Harmful or fatal if swallowed. Do not take internally. If swallowed, do not induce vomiting. Contact a physician immediately. Vapor harmful. Avoid inhalation of spray mist or vapors. If overcome, move patient to fresh air. Call a physician immediately. Eye irritant. Avoid contact with eyes and skin. In case of eye contact, flush immediately with water and continue for 15 minutes. If irritation persists, see a physician. For skin contact, wash with soap and water. If irritation persists, call a physician immediately. Contents under pressure. Do not puncture or incinerate container. **Do not store at temperatures above 120°F. KEEP OUT OF REACH OF CHILDREN.** CAS NUMBERS: Isobutane/Propane Blend.

FEATURES & BENEFITS

- Wide web spray
- Temporary or permanent bond to most surfaces
- No chlorinated solvents
- No ozone depleters
- Waterproof, flexible, transparent and non-staining
- Ideal for uneven or porous surfaces or weight materials
- Use this product for your toughest adhesive applications

MATERIAL

Professional heavy-duty contact glue spray.

FEATURES

Very aggressive.

SIZES

12 oz.

APPLICATIONS

Foam, wood, cardboard, paper, metal, cloth, plastic, fabrics, canvas, carpet, foils, photos, felt, leather, rubber, cork, glass, films, fiberglass, tissue paper, collages, ceramics, balsa wood, styrofoam, displays, photo composition, layouts, trims, jute pads, kick pads, latex foams, polyurethane foams, styrene board, drywall, particle board, laminate, insulation, polyethylene film, PVC drywall trim, HVAC duct liner.

FLAMMABILITY

Flammable.

VOC CONTENT

54.9%.

HMIS RATING

Health = 2, Flammability = 3, Reactivity = 0, Personal Protection = B.

FLAMMABILITY

ASTM E84, Class A. Flame Spread: 23; Smoke Developed: 30.

DIRECTIONS

Always shake well before using. Never aim valve at face. Hold can upright and apply adhesive in a side-to-side motion 10 to 14 inches from surface.

CLEANING SPRAY TIP

When finished with a particular spray application, always turn heavy-duty contact glue spray upside down and spray for two seconds to clear valve and prevent clogging. If contact adhesive spray accumulates around nozzle, wipe clear while wet. If dried in valve opening, remove with degreasing solvent.

Test Reports & Additional Information Can be Found at:

https://www.acousticalsurfaces.com/sealants_adhesives/contact_adhesive.htm



ACOUSTICAL | SURFACES, INC.

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com