




# Acoustical Surfaces, Inc.

Soundproofing, Acoustics, Noise & Vibration Control Specialists

123 Columbia Court North • Suite 201 • Chaska, MN 55318  
(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)  
Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

We Identify and **S.T.O.P.** Your Noise Problems

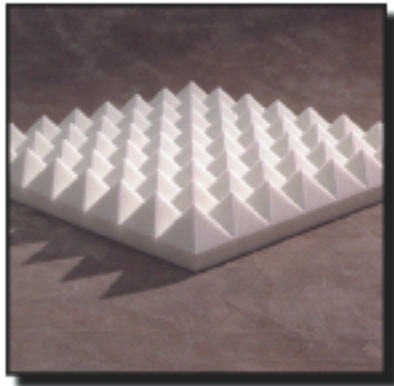

## FOAM S.T.O.P. PYRAMID™

Melamine Foam Sound Absorber

- ✓ **High Performance Absorber**
- ✓ **Increased Absorptive Surface Area**
- ✓ **Fiber Free**
- ✓ **Class A Fire Retardant**

**MATERIAL:** Open Cell Melamine Acoustical Foam

**PATTERN:** Pyramid for Monolithic Appearance

**FEATURES:** Increased Surface Area, High Performance, Light Weight, Dramatic Visual Effect

**APPLICATIONS:** Ceilings, Walls, Industrial, Commercial & Home Audio Markets, Broadcasting and Recording Studios

**THICKNESS:** 2", 3", 4" **SIZES:** 2'x2', 2'x4'm, Custom sizes also available **DENSITY:** 0.7lbs/cub. ft.

**COLOR:** Natural White, Latex or Cleanable Dupont Hypalon Paint - Black, Light Grey, Almond, White and custom colors also available.

**FLAMMABILITY:** ASTM E-84, Class A. Flame Spread: 5; Smoke Developed: 45 (Painted F/S: 45, S/D: 10)

**INSTALLATION:** ASI S.T.O.P. Noise Acoustical Adhesive

FOAM S.T.O.P.: Sound Absorption/Noise Reduction per ASTM C423-80a							
B Mtg	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70
3"	0.18	0.44	0.96	1.14	1.18	1.19	0.95
4"	0.16	0.62	1.10	1.20	1.21	1.22	1.05

